

CRYSTAL OSCILLATOR

LiHOM XTALS XTAL/OSC

LIHOM P/N : BMS-873H

FEATURES


- DIMENSION (mm) : 7.00 X 5.00 X 1.80
- CERAMIC PACKAGE
- HCSL OUTPUT
- SEAM SEALING
- RoHS COMPLIANT



SPECIFICATIONS

Item	Conditions	Specifications		
1	HOLDER TYPE	BMS-873H	5.0X7.0mm	
2	POWER SUPPLY VOLTAGE	V	3.3±5%	2.5±5%
3	FREQUENCY RANGE	MHz	13.5 ~ 156.25MHz	13.5 ~ 156.25MHz
4	FREQUENCY STABILITY	PPM	±25ppm ~ ±100ppm	
5	OPERATING TEMPERATURE RANGE	°C	-20 ~ +70 °C (-40 ~ +85 °C Option)	
6	STORAGE TEMPERATURE RANGE	°C	-55 ~ +125 °C	
7	CURRENT CONSUMPTION	mA	40mA	
8	SYMMETRY		45/55%	
9	RISE / FALL TIME	20% ~80%Vdd	1nS	
10	OUTPUT VOLTAGE LEVEL	VoH	740mV Typical	
		VoL	0mV Typical	
11	OUTPUT VOLTAGE SWING	VOD	700mV Typical	
11	OUTPUT LOAD	Ω	50 Ω (Connect to GND)	
12	PHASE JITTER	RMS	<1.0pS RMS	
13	TRI-STATE FUNCTION		#1:"High(open)"->Output enable / #1:"Low"->Output disable	
14	AGING/YEAR	PPM	<±3ppm	

DIMENSION

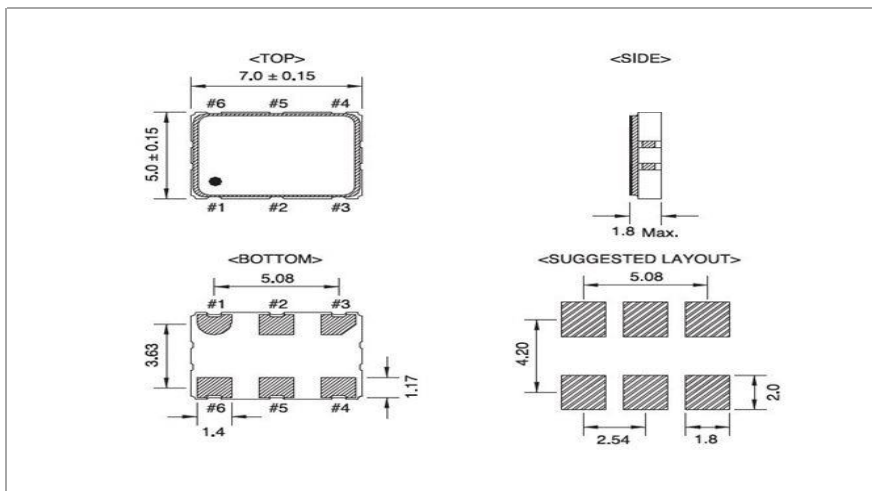

TERMINAL	CONNECTION
#1	TRI-STATE
#2	N.C
#3	GND
#4	OUTPUT
#5	Comp.OUTPUT
#6	Vdd